


HELI

ZAPI intelligent display provides vital information such as speed and battery discharge status and is used to customize performance parameters

**ZAPI intelligent display****Standard configuration**

AC travelling motor
AC lifting motor
AC steering motor
ZAPI travelling motor controller
ZAPI lifting motor controller
ZAPI steering motor controller
Electromagnetic brake
DC/DC converter
Low noise gear pump
Electromagnetic proportional valve
5330mm(218 in.) three stage full free lift mast
integral pantograph
Standard fork
Overhead guard
Load backrest
Polyurethane tire
LED combined display
Front work light
LED warning light
Automatic steering slow down device
Automatic Parking brake
Operator's tool kit
Adjustable armrest
Adjustable backrest

Optional

Three-stage full free lift mast(other lifting height)
Fork extension
Lifting height pre-selector
Monitoring system
Other battery
Germany HOPPECKER battery
Italy FAAM battery
Battery charger
Custom paint
Operator protection guard

* Details of specifications and equipment are based on information available at time of printing and may change without notice.



ANHUI HELI CO., LTD.
ADD: NO.668 Fangyang Street, Economic Development Zone, Hefei, P.R. China
TEL: (86 551) 63639068 (America) 63639258 (Europe) 63639358 (Asia)
63662105 (Africa & Middle East) 63639530 (Warehouse Equipment)
63639531 (Wheel loader)
FAX: (86 551) 63639966
WEBSITE: <http://www.helichina.net>
Email: hel@helichina.net

AUTHORIZED DEALER

Catalog No.201109 Forklift Print

HELI**3000lbs CQD14X2**

36/48V Reach Truck
G Series AC Electric

www.helichina.net**G SERIES 3000lbs**

Operator compartment provides comfort and efficient operation

Great visibility for improved operation and safety

Bolt on outrigger boxes and easy change load wheels

Easy access to drive components

Adjustable backrest and armrest help reduce fatigue

Operator comfort

- Adjustable backrest and armrest help reduce fatigue
- Multifunction control is ergonomically designed and easy to use
- All controls are within easy reach to help reduce body strain
- Compartment floor is angled and spring suspended to reduce leg and back strain

Safety

- Side stance improves operator's visibility both forward and backward
- Automatic park brake applies when operator leaves the compartment or shuts forklift off
- Programmable automatic deceleration in turns adds to safe operation
- Warning lights and OPS system come standard

Improved operator's view

- Large, rounded overhead guard is stylish and combined with strategically angled bars provides maximum visibility
- Newly designed, wide view mast with special chains enlarges the operator's view looking forward

Energy efficiency

- With an optimized hydraulic system, truck is more energy efficient
- All LED lights saves 80% of lighting energy
- Regenerative motor braking recycles more energy during braking cycles
- Programmable speed and acceleration settings can be set for maximum energy efficiency

Serviceability

- Side door gives easy access to drive motor and gearbox
- Chassis components are well laid-out and can be accessed with removable top and front covers

Overhead guard


- Overhead guard attaches directly to mast to eliminate front guard legs
- Optimally designed for maximum operator visibility
- Standard with left side guard leg for added strength
- Optional operator compartment guard leg for added safety

Working efficiency

- Small turning radius makes steering flexible and easy
- With ZAPI control and AC powered motors, drive and lift systems can be programmed for maximum efficiency and performance
- The large battery capacity for longer single shift work operation
- With standard battery roller and side removal, battery-change is quick and easy

Wide view mast and pantograph

- Comes standard with side shift, tilt and reach functions
- Wide-view mast and pantograph maximize operator's view
- Lift cylinders have end stroke cushions for smooth stopping
- ZAPI controller provides in transit buffers to ensure smooth lifting and lowering throughout the lifting cycle
- The controller also provides in-transit and end stroke buffer for the reach function

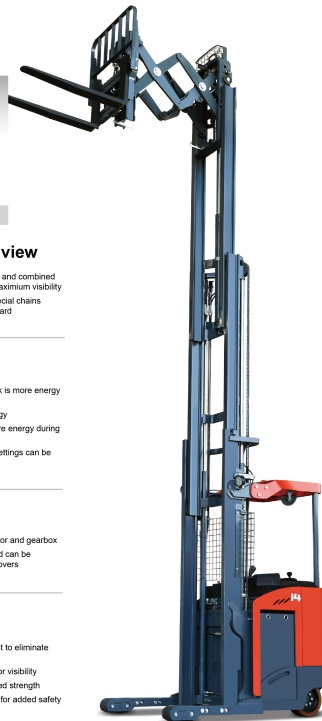

Heli's New Reach Trucks

Designed for productivity



ZAPI smart display & multi-function joystick

Designed for safety



Standard lights, mesh finger guard & overhead guard with leg

Designed for serviceability



Easy to remove covers to access all electric and hydraulic components





Manufacturer's Data and Design Characteristics												
Characteristics												
1.01		Manufacturer		COD14X2			COD14X2			COD14X2		
1.02		Model		GA2R			GB2R			GC2R		
1.03		Configuration number										
1.04		Load capacity		Q	lb	kg	3000	1350	3000	1350	3000	1350
1.05		Load center distance		C	in	mm	24	600	24	600	24	600
1.06		Power model		Electric			Electric			Electric		
1.07		Driving model		Stand			Stand			Stand		
1.08		Wheel base		L2	in	mm	61.3	1557	62.7	1593	65.2	1655
1.09		Voltage		v			36			36		
2.01		Tyre type		PU			PU			PU		
2.02		Wheel rubber, drive/load/caster(X=drive wheel)		1x/4/2			1x/4/2			1x/4/2		
2.03		Wheel size, load		in	mm		Ø6×3.7	Ø127×95	Ø6×3.7	Ø127×95	Ø6×3.7	Ø127×95
2.04		Wheel size, caster		in	mm		Ø13×5.5	Ø330×140	Ø13×5.5	Ø330×140	Ø13×5.5	Ø330×140
2.05		Wheel size, caster		in	mm		Ø7.4×3	Ø178×76	Ø7.4×3	Ø178×76	Ø7.4×3	Ø178×76
Dimensions												
3.01		Lift height		H	in	mm	210	530	210	530	210	530
3.02		Free lift		H1	in	mm	99	2526	99	2526	99	2526
3.03		Mast height, lowered		H8	in	mm	59	1490	59	1490	59	1490
3.04		Fork size, thickness/width/length		s/l/l	in	mm	1.4×3.9×36.2	35×100×920	1.4×3.9×36.2	35×100×920	1.4×3.9×36.2	35×100×920
3.05		Fork adjusting width		W4	in	mm	9.6-28.5	244-724	9.6-28.5	244-724	9.6-28.5	244-724
3.06		Tilt			deg	deg		3°/4°		3°/4°		3°/4°
3.07		Fork side-tilting			deg	deg	±2	±50	±2	±50	±2	±50
3.08		Truck body length (fork excluded)		L	in	mm	77	1954	78	1990	81	2052
3.09		Truck body width		W	in	mm	42.9	1090	42.9	1090	42.9	1090
3.10		Straddle leg, inside width		W2	in	mm	33.2-50	845-1272	33.2-50	845-1272	33.2-50	845-1272
3.11		Straddle leg, outside width		W1	in	mm	44.7-61.5	1137-1564	44.7-61.5	1137-1564	44.7-61.5	1137-1564
3.12		Fork carriage width		W3	in	mm	33	842	33	842	33	842
3.13		Reach distance		S	in	mm	43	1080	43	1080	43	1080
3.14		Height of overhead guard		H7	in	mm	91	2320	91	2320	91	2320
3.15		Battery bottom clearance		H4	in	mm	7.1	180	7.1	180	7.1	180
3.16		Straddle clearance		H5	in	mm	2	50	2	50	2	50
3.17		Straddle height		H9	in	mm	5.1	130	5.1	130	5.1	130
3.18		Step height		H6	in	mm	250	635	250	635	250	635
3.19		Minimum turning radius		Wa	in	mm	72	1838	74	1874	76	1936
3.20		Drive wheel center to truck body rear distance		L1	in	mm	9.9	252	9.9	252	9.9	252
3.21		Fork front to truck body rear distance		L4	in	mm	60	1529	62	1565	64	1627
3.22		Aisle width with pallet 1200Lx1200w		Ast	in	mm	116	2935	117	2971	119	3033
3.23		Aisle width with pallet 1000Lx1000w		Ast	in	mm	107	2713	108	2749	111	2811
Performance												
4.01		Traveling speed, with/without load		mph	km/h		6.2/6.8	10/11	6.2/6.8	10/11	6.2/6.8	10/11
4.02		Lifting speed, with/without load		fpm	mm/s		45/102	330/520	45/102	330/520	45/102	330/520
4.03		Lowering speed, with/without load		fpm	mm/s		98/98	500/500	98/98	500/500	98/98	500/500
4.04		Reach speed, with/without load		fpm	mm/s		22/30	110/150	22/30	110/150	22/30	110/150
4.05		Maximum climb capability, with/without load		%	%		10/15		10/15		10/15	
Weight												
5.01		Total weight (without battery)		lb	kg		6063	2750	6107	2770	6151	2790
5.02		Axle loading, no load (front/rear)		lb	kg		3040/4897	1379/2221	3182/5125	1443/2325	3374/5277	1530/2394
5.03		Axle loading, loaded (front/rear)		lb	kg		6635/4278	3010/1940	6860/4423	3112/2006	6976/4651	3164/2110
Battery												
6.01		Battery voltage/capacity kS		kwh	Ah		32.6	930	38.1	1085	43.5	1240
6.02		Minimum battery weight		lb	kg		2350	1066	2800	1270	3100	1406
6.03		Minimum battery weight		lb	kg		1850	839	2200	998	2500	1134
6.04		Battery department size		in	mm		39.5×16.8×31.8	1005×428×810	39.5×16.8×31.8	1005×428×810	39.5×16.8×31.8	1005×428×810
Motor and controller												
7.01		Driving motor power		HP	kw		9.4	7	9.4	7	9.4	7
7.02		Lifting motor power		HP	kw		20.1	15	20.1	15	20.1	15
7.03		Steering motor power		HP	kw		0.8	0.6	0.8	0.6	0.8	0.6
7.04		Type of driving control					MOSFET/AC			MOSFET/AC		
7.05		Type of lifting control					MOSFET/AC			MOSFET/AC		
7.06		Type of steering control					MOSFET/AC			MOSFET/AC		
7.07		Transmission box					HELI special			HELI special		
7.08		Service brake					Electric			Electric		
7.09		Parking Brake					Automatic			Automatic		
7.10		Hydraulic system working pressure		PSI	Mpa		3050	21	3050	21	3050	21

NOTE: For detailed information about battery please contact your authorized Heli dealer. These are "Zero Clearance" aisles in the table and require an additional 150mm or more to be added to provide for easier maneuvering.

WIDE VIEW FULL FREE 3-STAGE MAST

Mast model	Fork Height		Free lift		Mast height		Load Capacity at 24" Load Center						Service Weight					
	in	mm	in	mm	in	mm	COD14X2-GA2R		COD14X2-GB2R		COD14X2-GC2R		COD14X2-GA2R		COD14X2-GB2R		COD14X2-GC2R	
ZSM502	198	5025	55	1390	96	2426	2976	1350	2976	1350	2976	1350	7893	3580	8263	3748	8607	3904
ZSM533	210	5330	59	1490	99	2526	2976	1350	2976	1350	2976	1350	7893	3600	8307	3768	8651	3924
ZSM610	260	6095	69	1745	109	2781	2646	1200	2646	1200	2646	1200	8091	3670	8461	3838	8805	3994
ZSM685	270	6855	79	2000	120	3036	2205	1000	2205	1000	2205	1000	8201	3720	8572	3888	8915	4044
ZSM762	300	7620	90	2285	131	3321	1764	800	1984	900	1984	900	8356	3790	8726	3958	9070	4114

AST: Right angle stacking aisle width
a: Clearance a=150mm



— COD14X2-GA2R
— COD14X2-GB2R
— COD14X2-GC2R

NOTE: The vertical axis is the load capacity and the horizontal axis is the load center which is calculated from the front face of the forks to the load center of gravity. Capacity curves shown are for a standard mast at zero degree tilt with standard forks. Changing mast tilting, non-standard forks or loading large goods can affect load capacity. This chart can be used to estimate load capacity at various load centers for standard masts. Contact Heli for specific load ratings for your situation.



RENEWABLE ENERGY TECHNOLOGIES

With the use of the excellent load-sensing steering system and AC controlling renewable energy technologies, the forklift is more energy-saving and the working hour of the battery is extended by 15%.



Certifications: These Heli models are CEC/CCO certified and also meet all requirements of ANSI B56.1-2012 and OSHA Regulation 29CFR1910.178 All dimensional and performance specifications shown are for reference and subject to change without notice.